

100

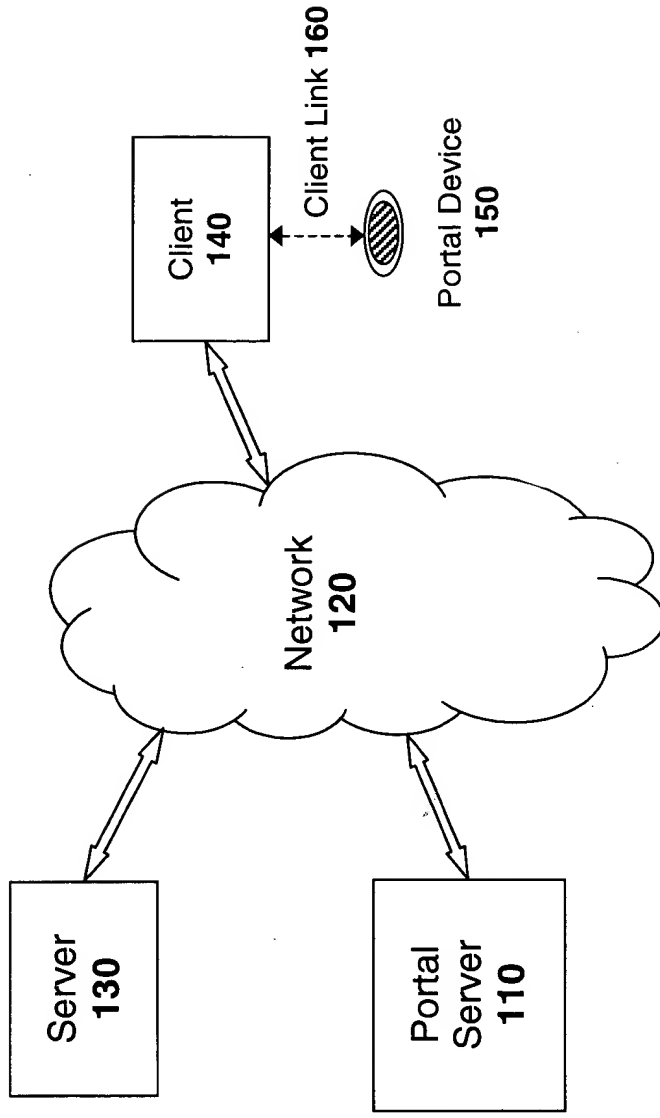


FIG. 1

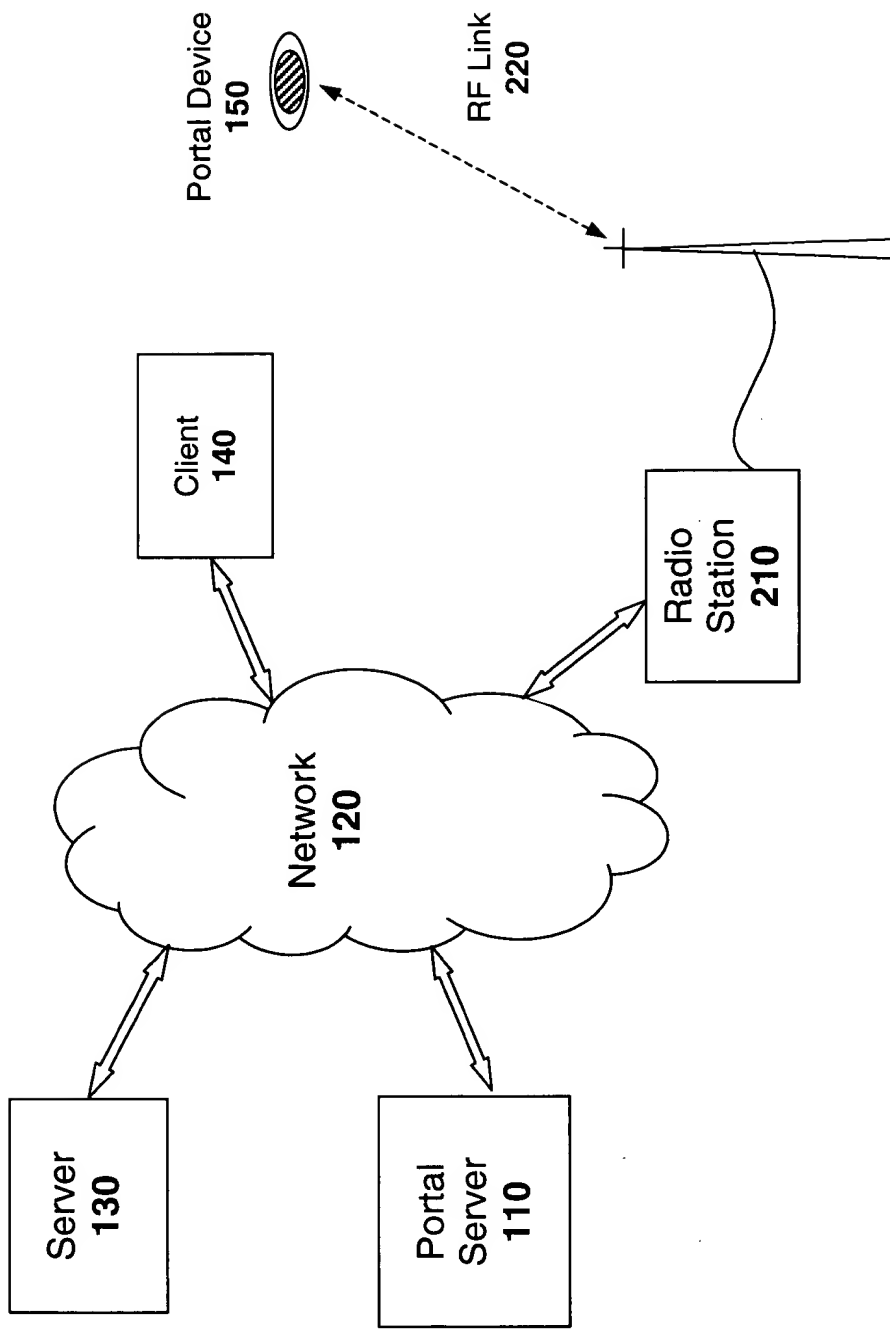


FIG. 2

FIG. 3 is a graph of Amplitude (A) versus Frequency (f) showing a radio signal 300. The signal is composed of an audio carrier 310 and a sub-carrier 320. The audio carrier 310 is a high-frequency sinusoidal wave, and the sub-carrier 320 is a lower-frequency sinusoidal wave. The radio signal 300 is the sum of the audio carrier 310 and the sub-carrier 320.

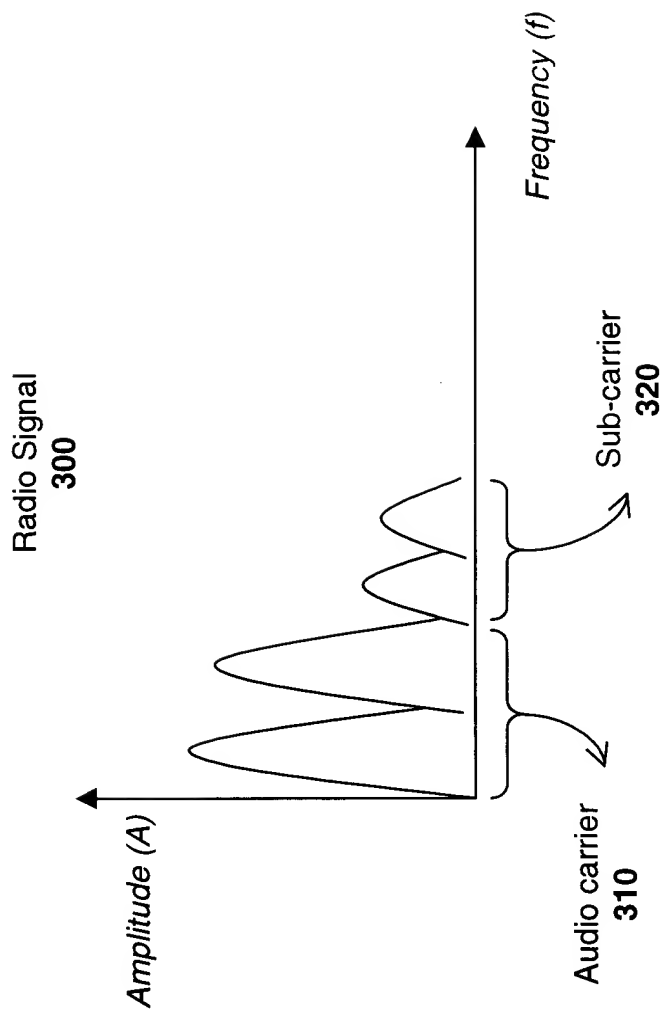


FIG. 3

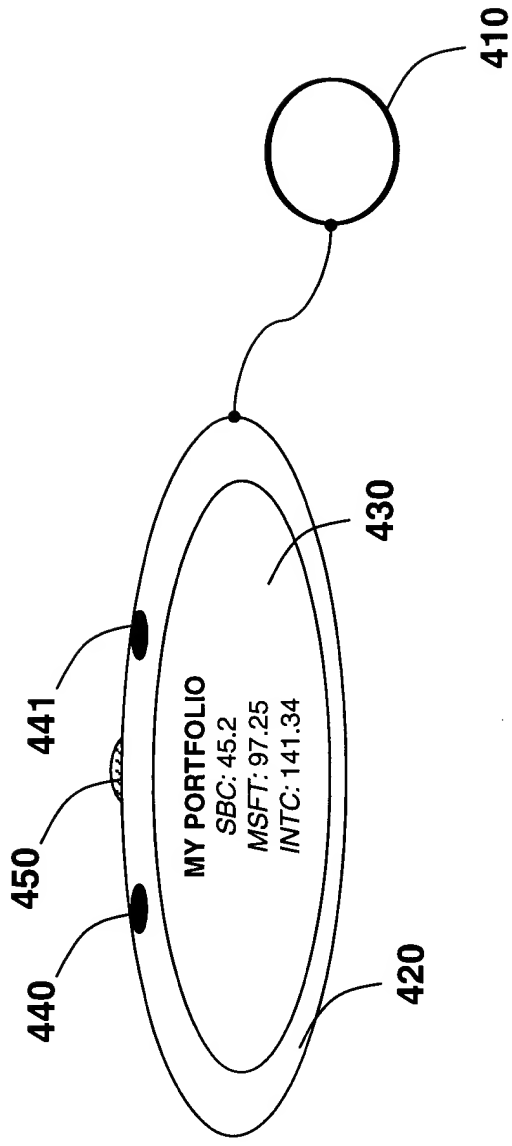


FIG. 4

FIG. 5 is a block diagram of a system 500 in accordance with an embodiment of the present invention.

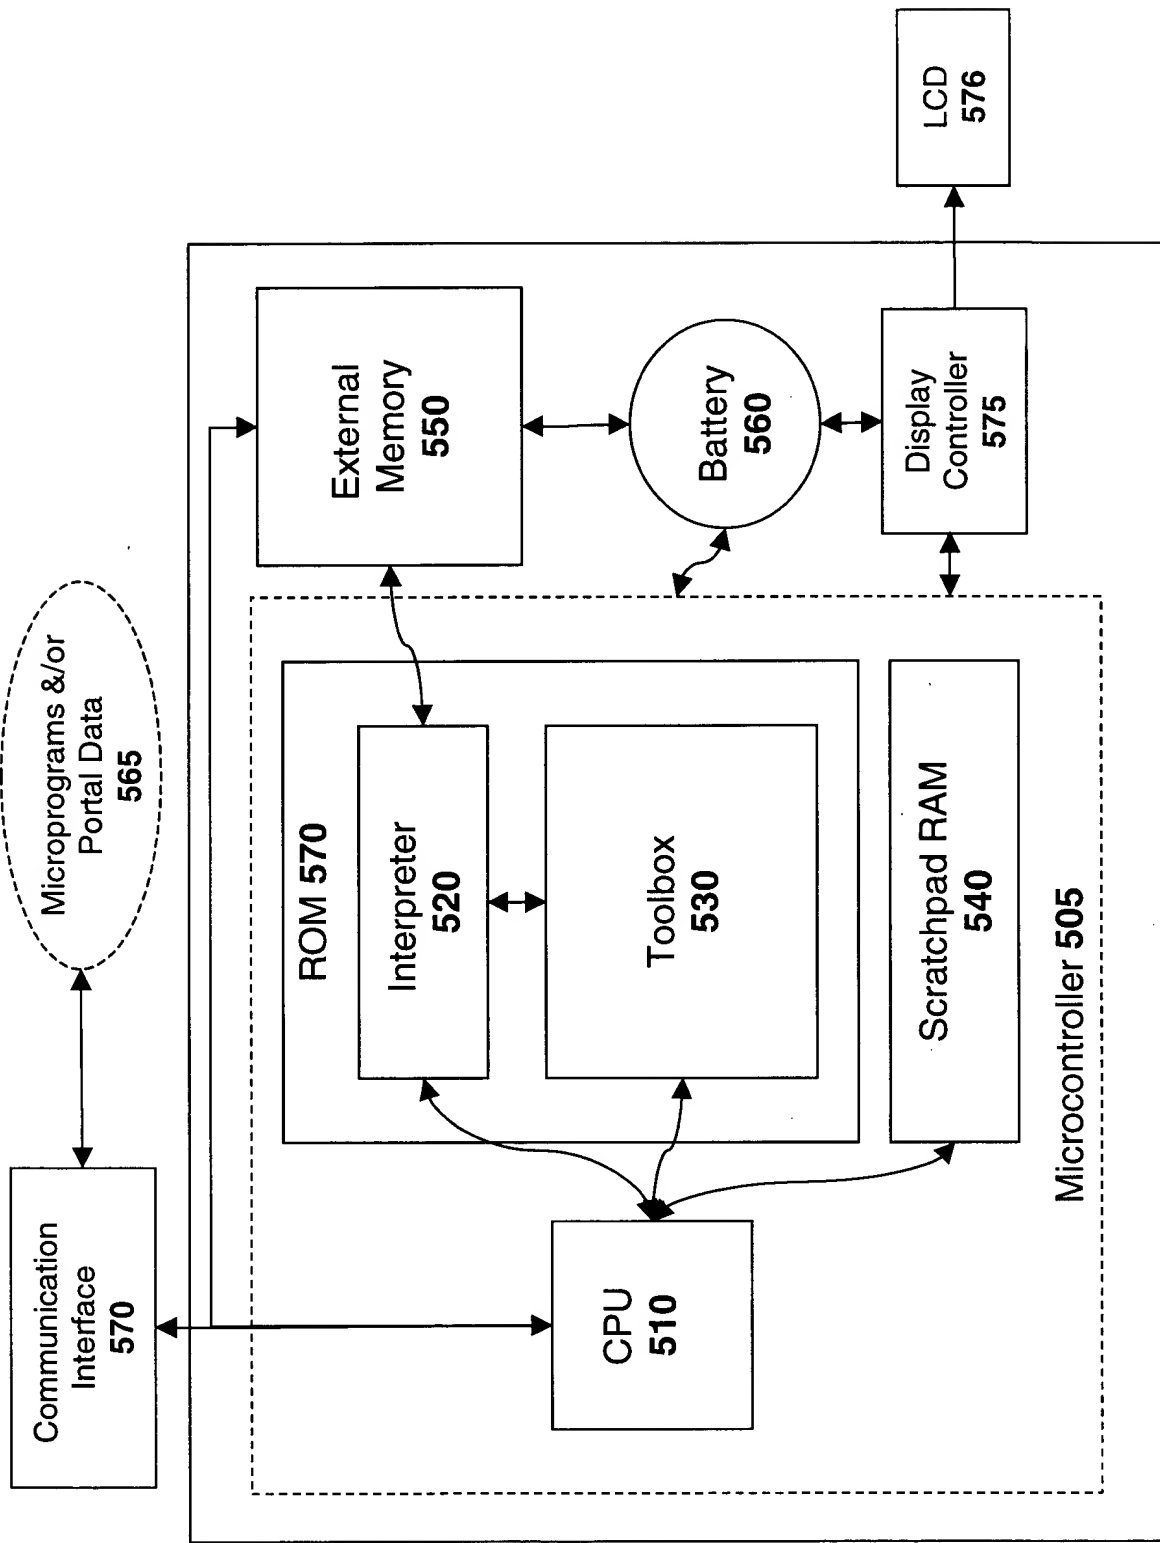


FIG. 5

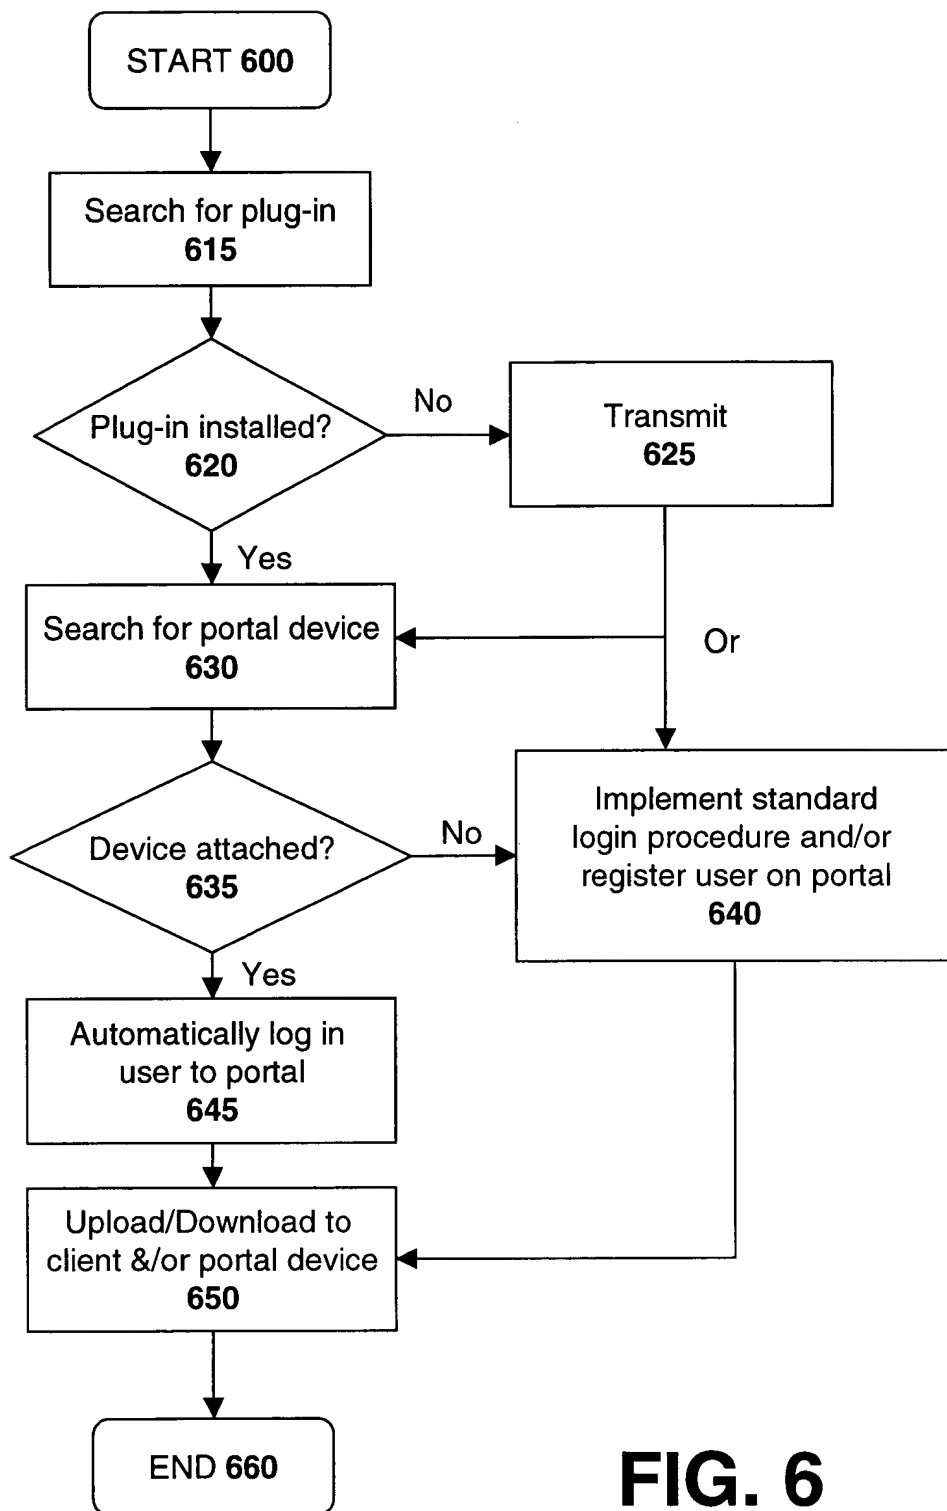


FIG. 6

US 2002/0102000 A1
May 16, 2002
Inventors: [illegible]
Attorney: [illegible]

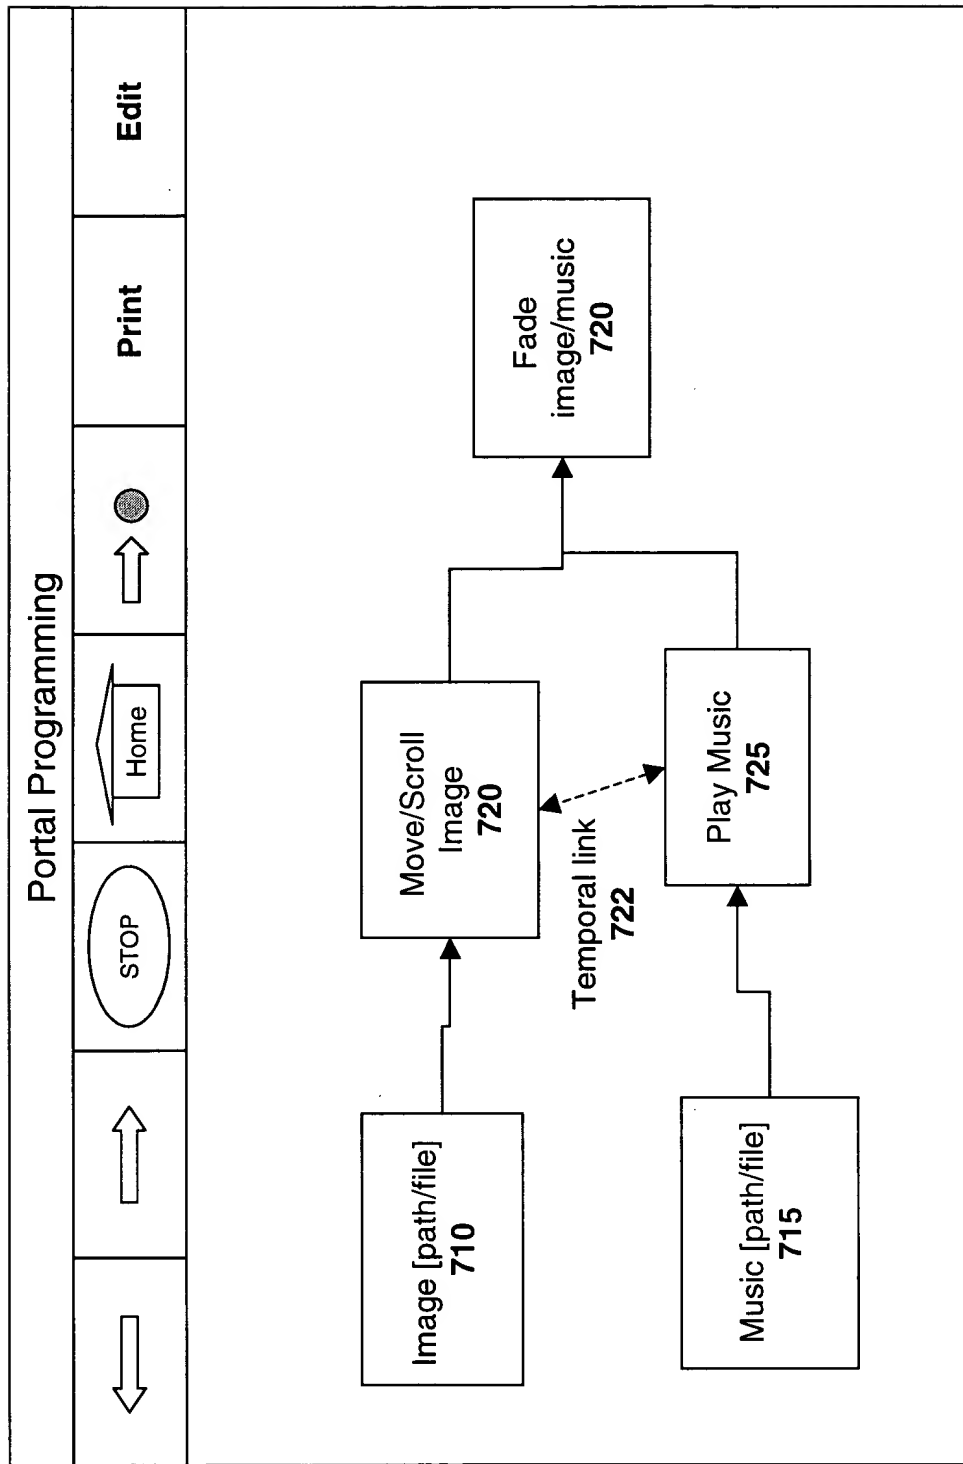


FIG. 7

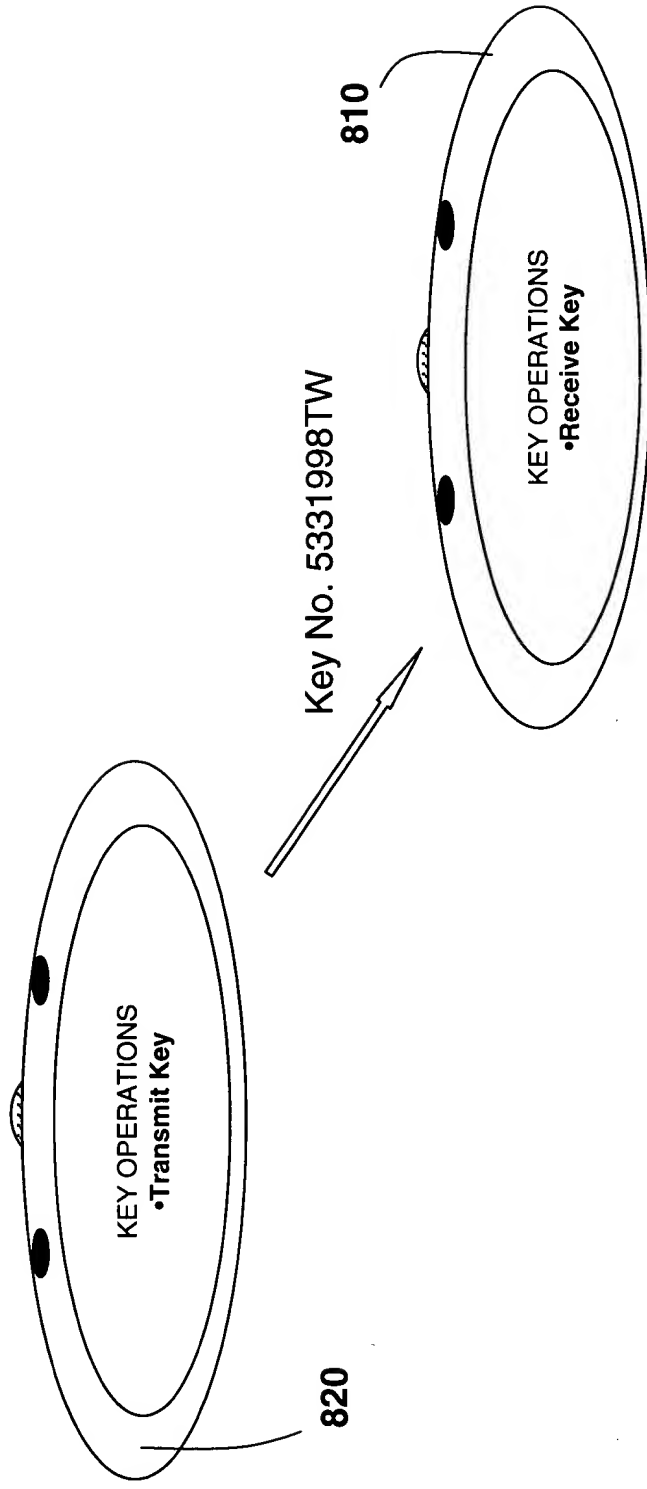


FIG. 8

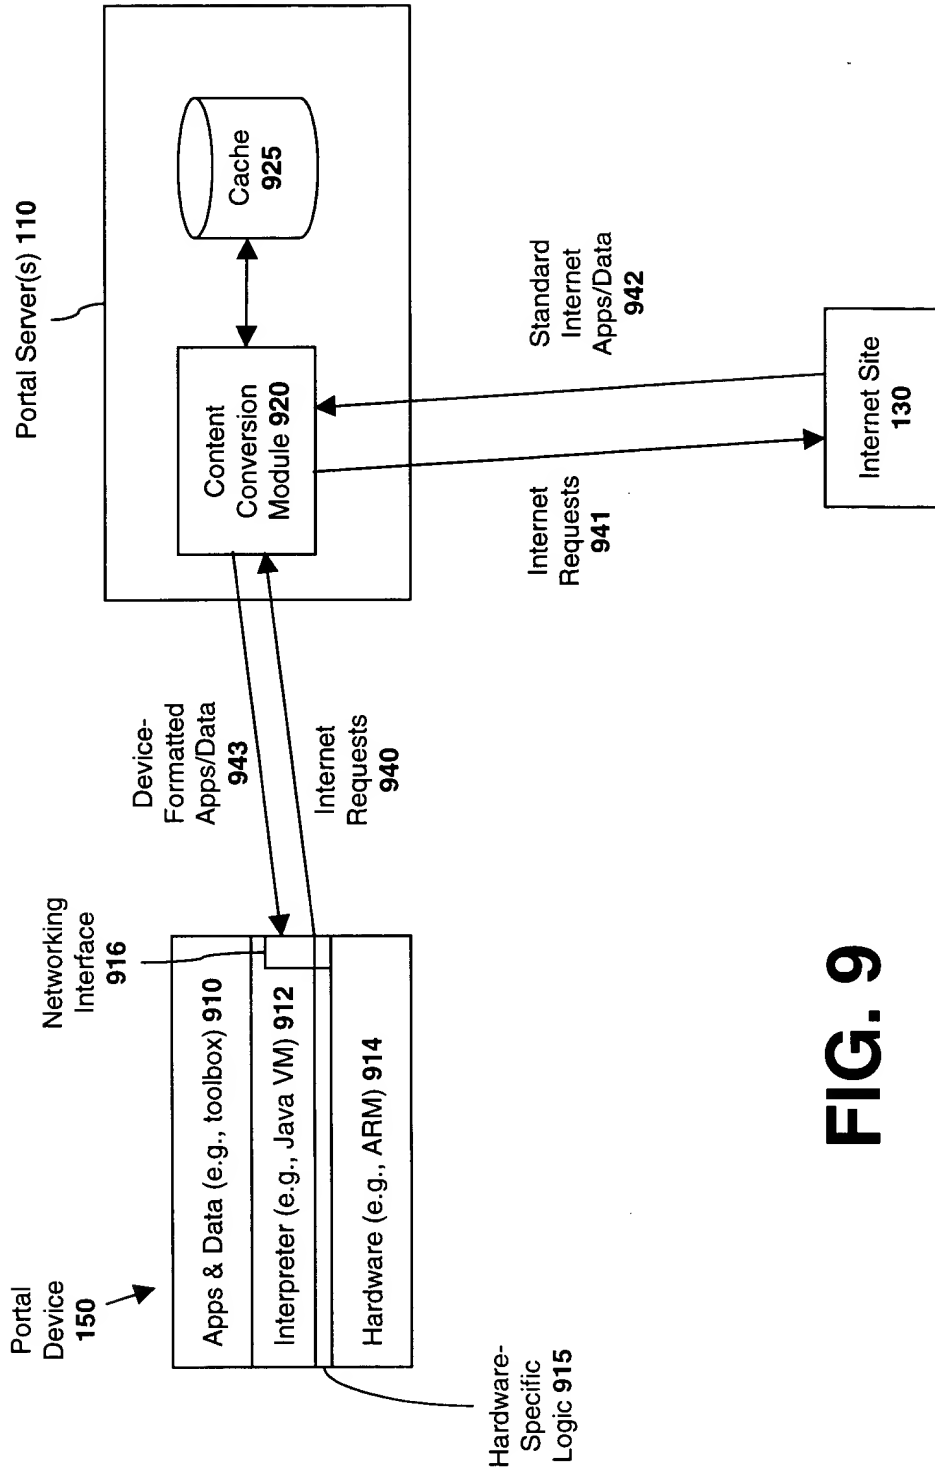


FIG. 9

FIG. 10

Transmission from Caller B
(e.g., email, telephone call)

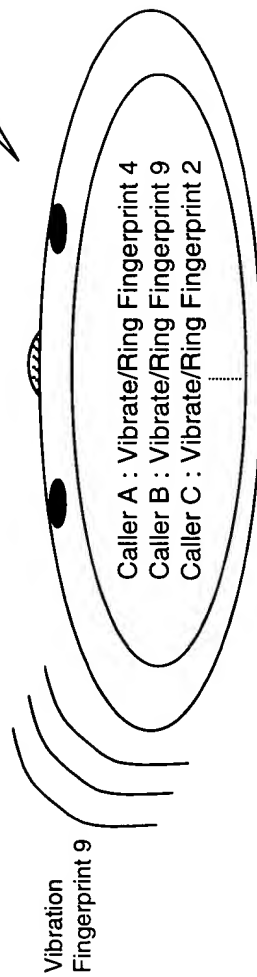



FIG. 10